


Cylinder 4 stage with double acting last stage

****ALLOW 50mm TO REMOVE CAP FOR SERVICING**

CUSTOMER TO CUT ACCESS HOLE IN CAP AS REQUIRED

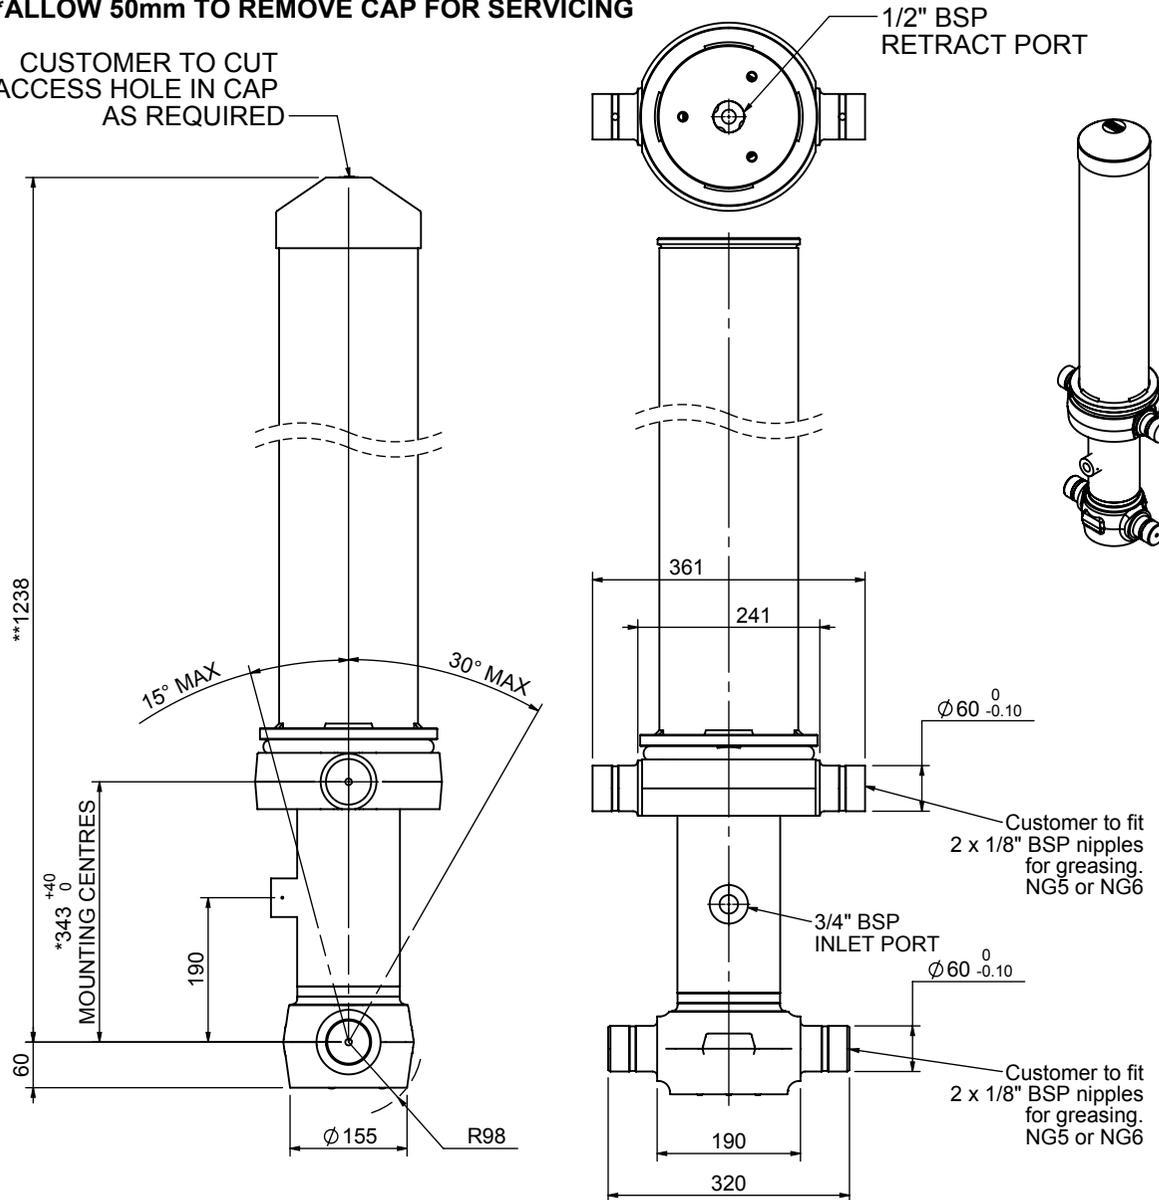


*Includes 14mm Pull Out.

CB110043802B19A11

SPECIFICATION		TIPPING CAPACITY :18-32 TONNES***		
Stage	Diameter	Length	Stroke	Swept Volume
OUTER COVER	184	840	-	-
0	136	1175	-	-
1	117	1140	949	10
2	98	1140	967	7
3	79	1140	972	5
4R	71	1140	914	-
4	63	1140	914	3
Total (+5/-10)			3802	25
Final stroke reduced by	0	Priming Volume		7
Cylinder Mass (Kg)	119	Total Volume (Litres)		32
Maximum Pressure (Bar)	150	Max. first stage thrust		130 KN


***TIPPING CAPACITY AT WORKING PRESSURE

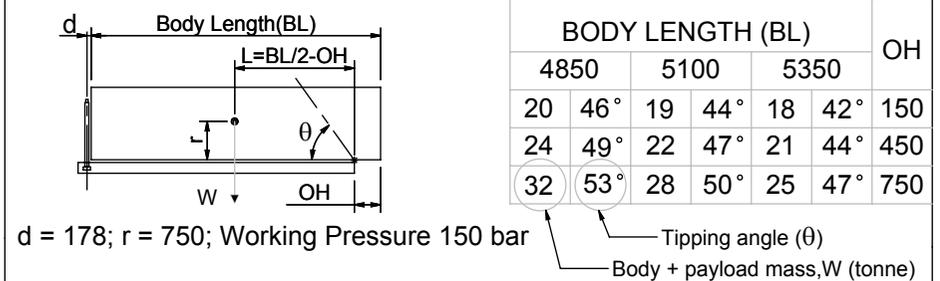

Retract force @ Stage 4 = 12.6kN @150bar maximum pressure

NOTES

- This cylinder is for lifting purposes only and side load conditions should be avoided
- Cylinder is painted in primer paint to RAL5013
- Refer to www.edbro.com for:-
 - Bracket details
 - Installation instructions that must be observed
 - Correct oil selection
 - An explanation of tipping capacity
- This cylinder is typically for intermittent use in vacuum tanker applications. Refer to Edbro for other uses.

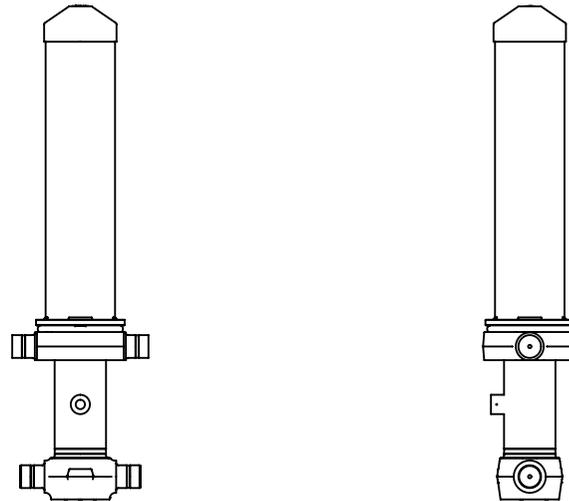

CB110043802B19A11