


Double acting cylinder 2 stage with trunnion

CD10TT201625BA10700

SPECIFICATION

Stage	Tube Diameter	Tube Bore	Length	Stroke	Swept Volume (Extend)	Swept Volume (Retract)
Base	117	106	1044	-	-	-
1	98	87	1009	810	7.1	1.0
2	79	71	1034	815	4.8	0.9
Total (+5/-10)				1625	mm	
Final stroke reduced by				0	mm	
Swept Vol (Extend)				11.9	Litres	
Swept Vol (Retract)				1.9	Litres	
Maximum Pressure				175	Bar	
Operating Pressure				150	Bar	
Cylinder Mass				54	kg	
Stage	Thrust (t)					
	Extend	Retract				
1	13.5	2.0				
2	9.1	1.6				

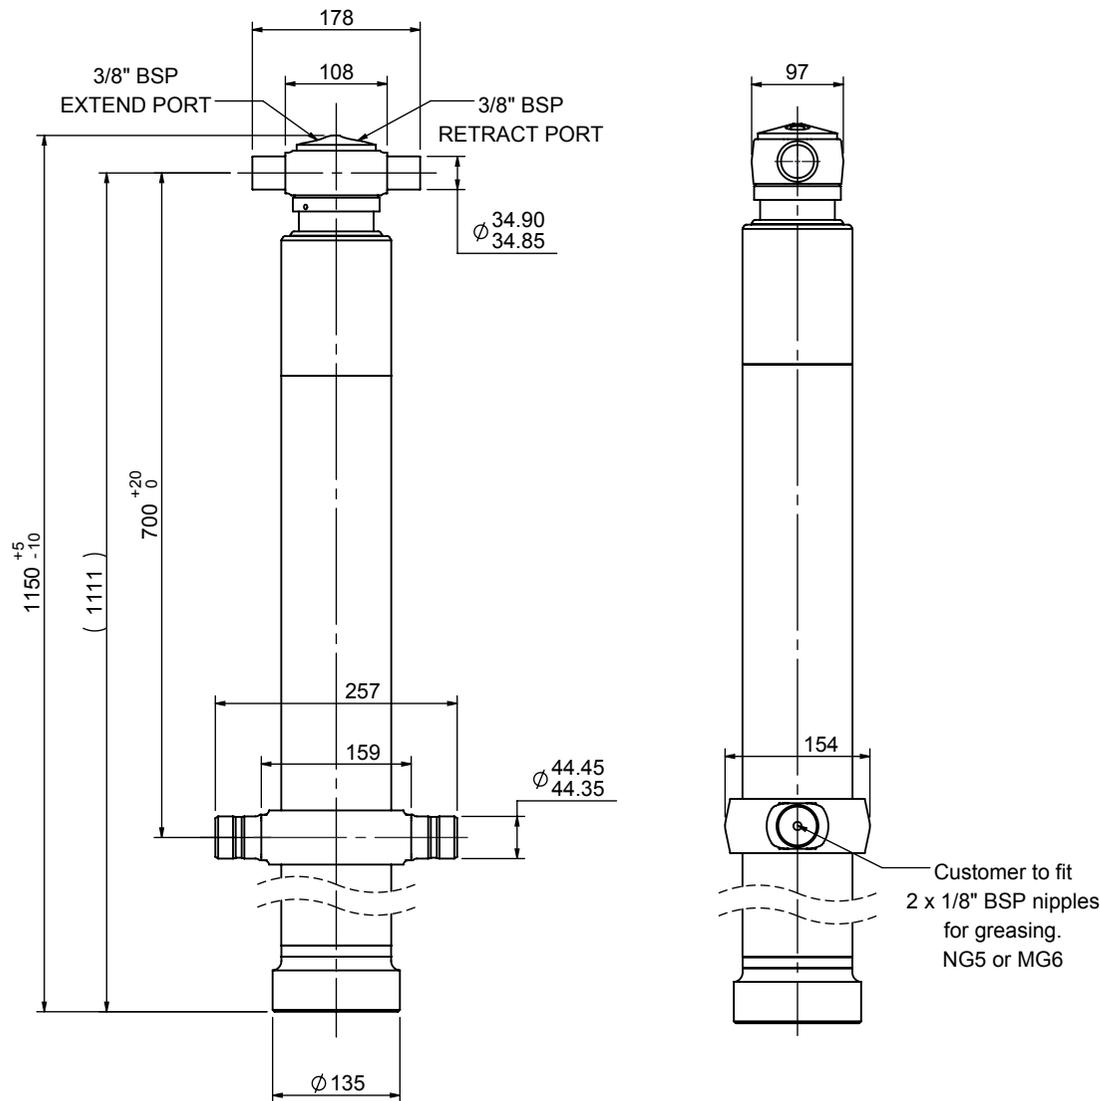

NOTES

- This cylinder is intended for load ejection purposes only and should not be used for compacting.
- Cylinder is painted in primer to RAL5013.
- Refer to www.edbro.com for:-
 - Bracket details
 - Installation instructions that must be observed
 - Correct oil selection
 - An explanation of ejection capacity

ALL TUBES HARD CHROMED

