


Double acting cylinder 4 stage with plain & spheric eyes

CD13SS4004750BB11683AA

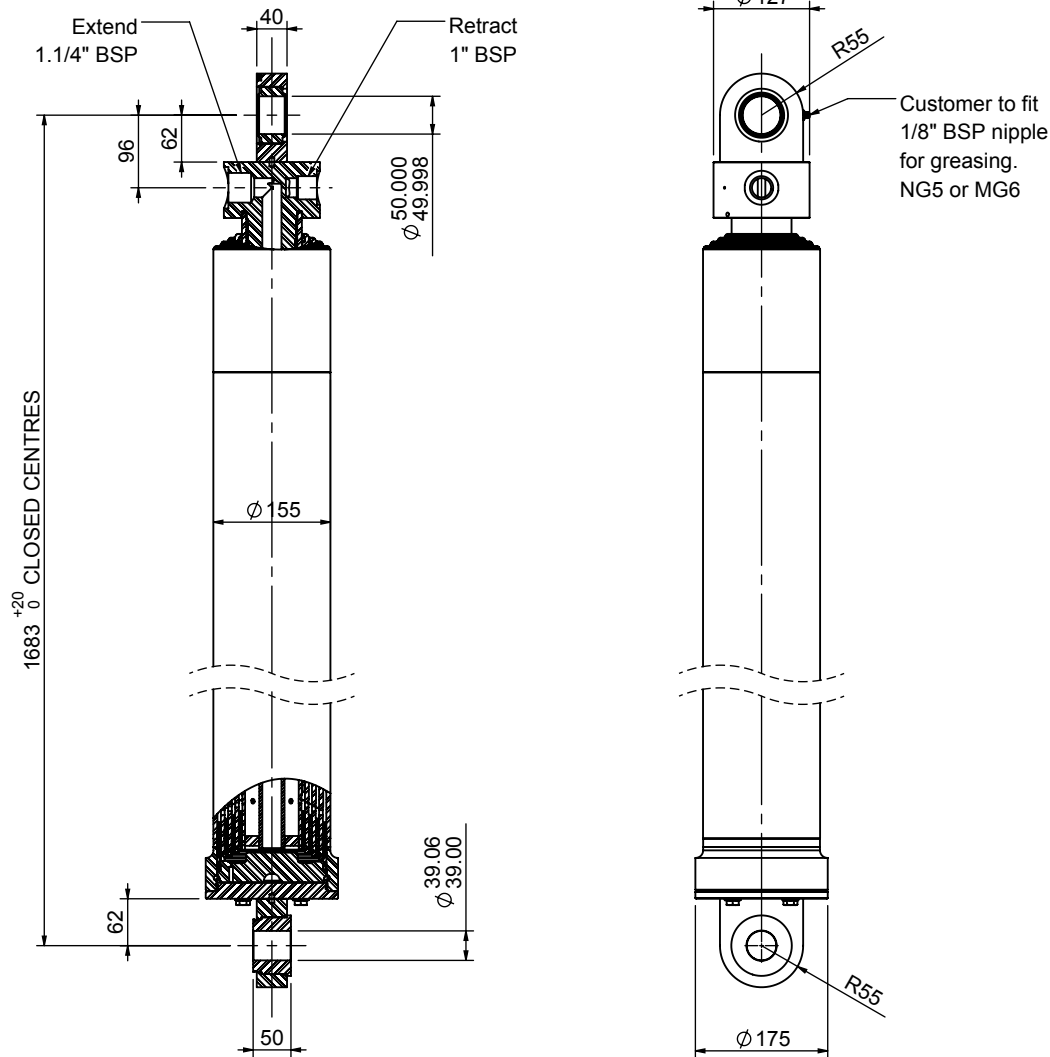

SPECIFICATION

Stage	Tube Diameter	Tube Bore	Length	Stroke	Swept Volume (Extend)	Swept Volume (Retract)
Base	155	144	1438	-	-	-
1	136	125	1404	1184	19.3	2.1
2	117	106	1404	1200	14.7	1.8
3	98	87	1404	1205	10.6	1.5
4	79		1429	1160	6.9	1.2
Total (+5/-10)				4749	mm	
Swept Vol (Extend)				51.5	Litres	
Swept Vol (Retract)				6.6	Litres	
Maximum Pressure				190	Bar	
Cylinder Mass				133.13	kg	
Stage	Thrust (t)					
	Extend	Retract				
1	31.5	3.4				
2	23.8	2.9				
3	17.1	2.5				
4	11.5	2.0				

NOTES

- This cylinder is intended for load ejection purposes only and should not be used for compacting.
- Cylinder is painted in primer to RAL5013.
- Refer to www.edbro.com for:-
 - Bracket details
 - Installation instructions that must be observed
 - Correct oil selection
 - An explanation of ejection capacity

INNER TUBES HARD CHROMED

Edbro
SETTING THE INDUSTRY STANDARD

Edbro plc
Nelson Street, Bolton, England, BL3 2JJ
Tel +44 (0) 1204 528888 Fax +44 (0) 1204 531957
Email: postmaster@edbro.com Web: www.edbro.com

Technical Specifications are subject to change without notice
Date Created/Updated: 09 November 2018
Refer www.edbro.com to confirm latest specification
All dimensions are in 'mm', unless otherwise stated