


Cylinder 5 stage front end with outer cover

****ALLOW 50mm TO REMOVE CAP FOR SERVICING**

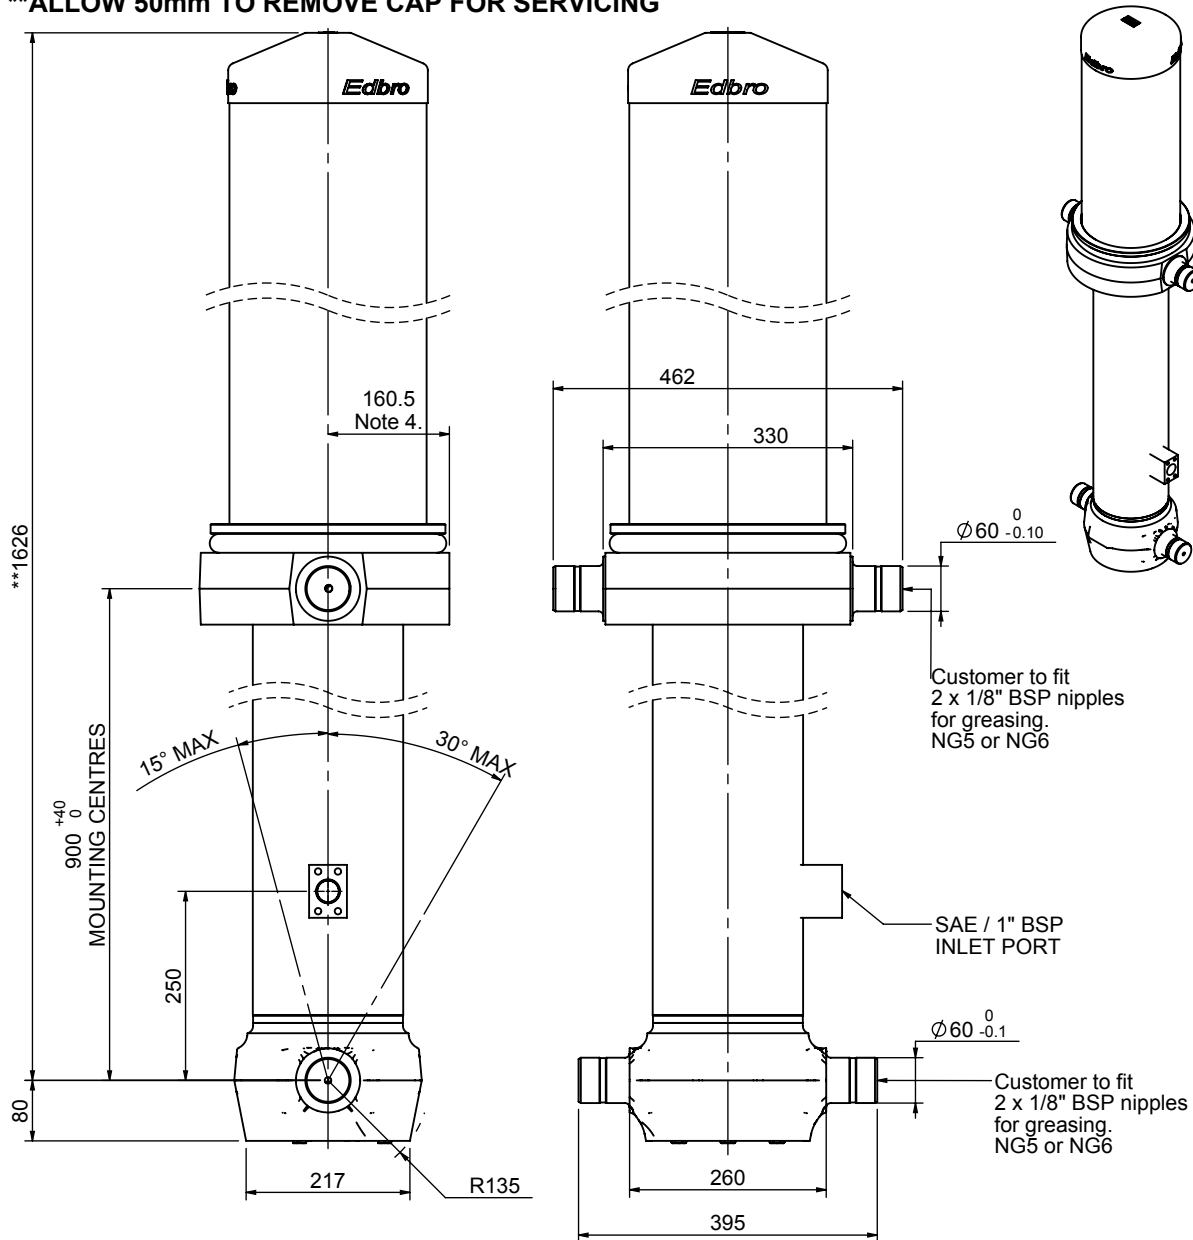

***Includes 12mm Pull Out. All Stages Chrome Plated**

CS170056283S25KAJC

SPECIFICATION		TIPPING CAPACITY : REFER EDBRO		
Stage	Diameter	Length	Stroke	Swept Volume
OUTER COVER	261	690	-	-
0	199	1575	-	-
1	176	1540	1314	32
2	155	1540	1337	25
3	136	1540	1347	20
4	117	1540	1362	15
5	98	1540	917	7
Total (+5/-10)			6277	99
Final stroke reduced by	450	Priming Volume		29
Cylinder Mass (Kg)	290	Total Volume (Litres)		128
Maximum Pressure (Bar)	190	Max. first stage thrust		265 KN

***TIPPING CAPACITY AT WORKING PRESSURE


Working Pressure 108 bar

For guidance only;

Higher working pressures and tipping capacities may be possible. To check your application email - applications@edbro.co.uk

NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer paint to RAL5013
3. Refer to www.edbro.com for:-
 - Bracket details
 - Installation instructions that must be observed
 - Correct oil selection
 - An explanation of tipping capacity
4. Trunnion ring machined for additional clearance

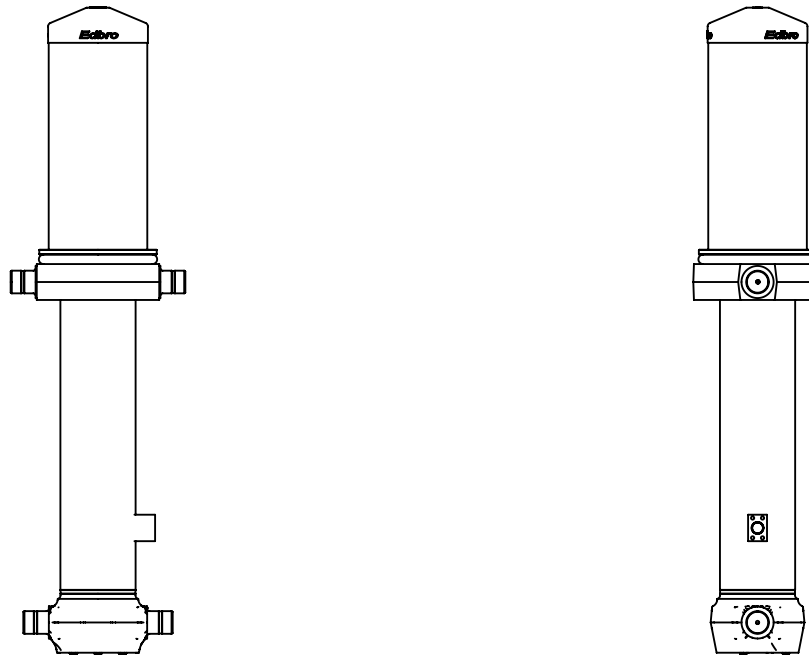

CS170056283S25KAJ