


Cylinder 5 stage front end with plain eye



***Includes 9mm Pull Out.
Last Stage Chrome Plated**

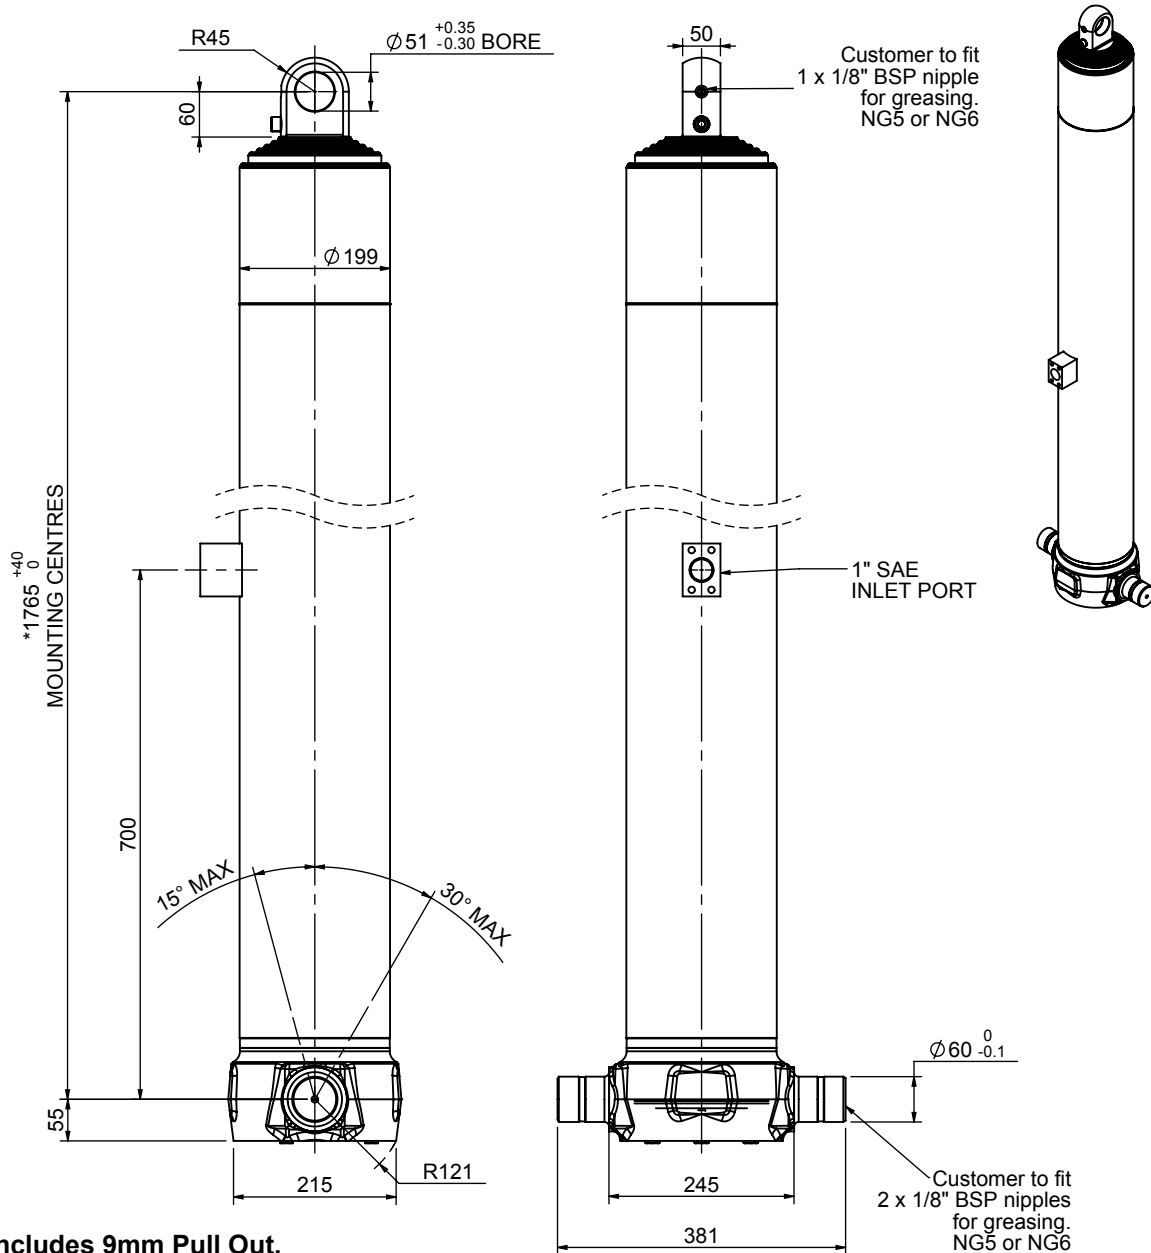

Edbro
SETTING THE INDUSTRY STANDARD

Edbro plc
Nelson Street, Bolton, England, BL3 2JJ
Tel +44 (0) 1204 528888 Fax +44 (0) 1204 531957
Email: postmaster@edbro.com Web: www.edbro.com


CS17LE57033S70K02

SPECIFICATION

TIPPING CAPACITY : 27-35 TONNES***

Stage	Diameter	Length	Stroke	Swept Volume
-	-	-	-	-
0	199	1725	-	-
1	176	1690	1468	36
2	155	1690	1487	28
3	136	1690	1497	22
4	117	1690	1512	16
5	98	1690	1067	8
		Total (+5/-10)	7031	110
Final stroke reduced by	450	Priming Volume		22.4
Cylinder Mass (Kg)	239	Total Volume (Litres)		132.4
Maximum Pressure (Bar)	190	Max. first stage thrust		200 KN

*****TIPPING CAPACITY AT WORKING PRESSURE**



BODY LENGTH (BL)						OH
8750		9250		9750		
28	49°	27	46°			150
31	51°	29	48°	27	45°	450
(35)	(53°)	32	50°	30	47°	750

d = 0; r = 900; Working Pressure 120 bar

For guidance only;


Higher working pressures and tipping capacities may be possible.

To check your application email - applications@edbro.co.uk

NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer paint to RAL5013
3. Refer to www.edbro.com for:-
 - Bracket details
 - Installation instructions that must be observed
 - Correct oil selection
 - An explanation of tipping capacity

Technical Specifications are subject to change without notice
Date Created/Updated: 05 November 2014
Refer www.edbro.com to confirm latest specification
All dimensions are in 'mm', unless otherwise stated

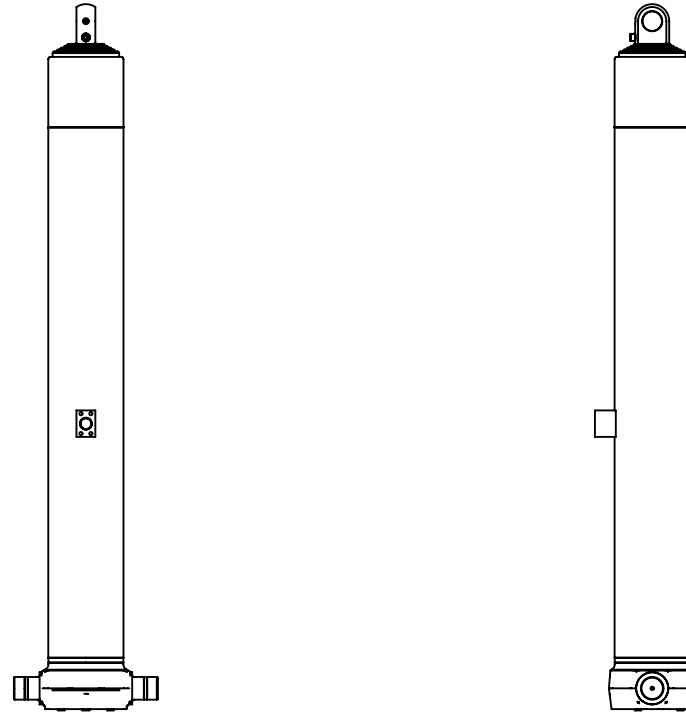

CS17LE57033S70K02