


Cylinder 5 stage front end with spherical eye

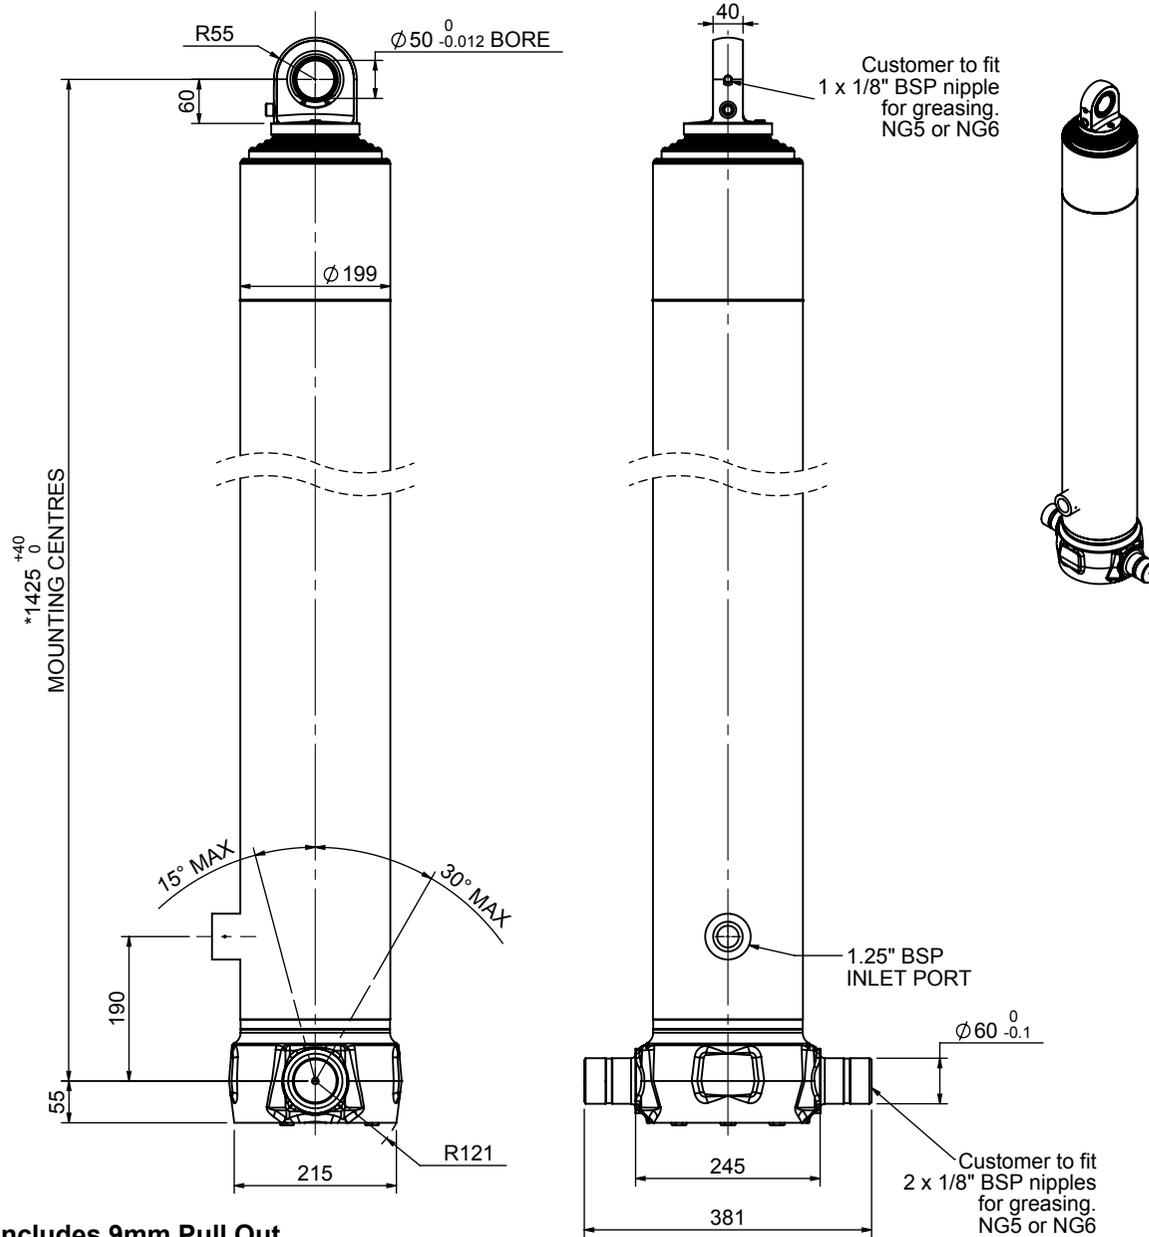


*Includes 9mm Pull Out.
Last Stage Chrome Plated

CS17LS55733B19A02

SPECIFICATION		TIPPING CAPACITY : 31-46 TONNES***		
Stage	Diameter	Length	Stroke	Swept Volume
-	-	-	-	-
0	199	1375	-	-
1	176	1340	1118	27
2	155	1340	1137	21
3	136	1340	1147	17
4	117	1340	1162	12
5	98	1340	1167	9
Total (+5/-10)			5731	86
Final stroke reduced by	0	Priming Volume	17.8	
Cylinder Mass (Kg)	198	Total Volume (Litres)	103.8	
Maximum Pressure (Bar)	190	Max. first stage thrust	200 KN	

***TIPPING CAPACITY AT WORKING PRESSURE

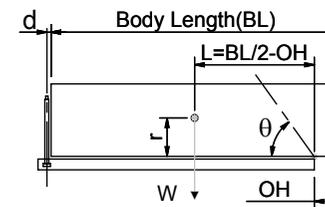

BODY LENGTH (BL)						OH
7250		7750		8250		
35	49°	33	45°	31	42°	150
40	51°	36	47°	34	44°	450
46	54°	41	49°	37	46°	750

d = 0; r = 900; Working Pressure 150 bar


For guidance only;

Higher working pressures and tipping capacities may be possible.

To check your application email - applications@edbro.co.uk

NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer paint to RAL5013
3. Refer to www.edbro.com for;-
 - Bracket details
 - Installation instructions that must be observed
 - Correct oil selection
 - An explanation of tipping capacity

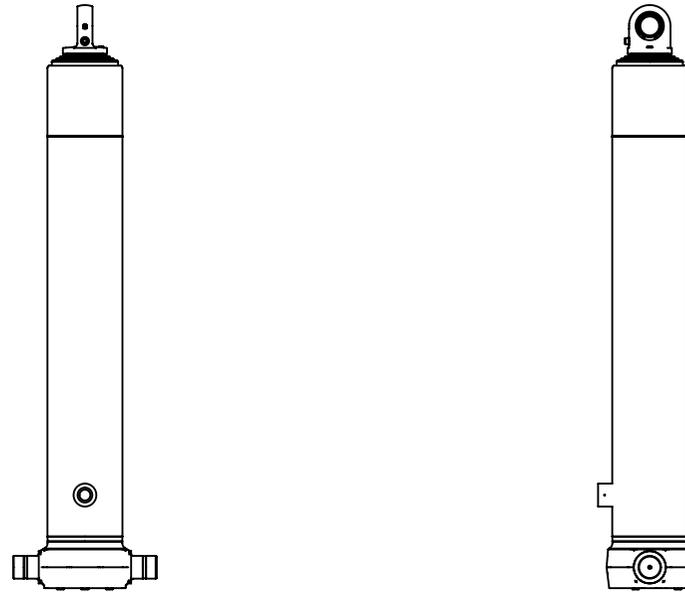

CS17LS55733B19A02