


Cylinder 5 stage front end with spherical eye

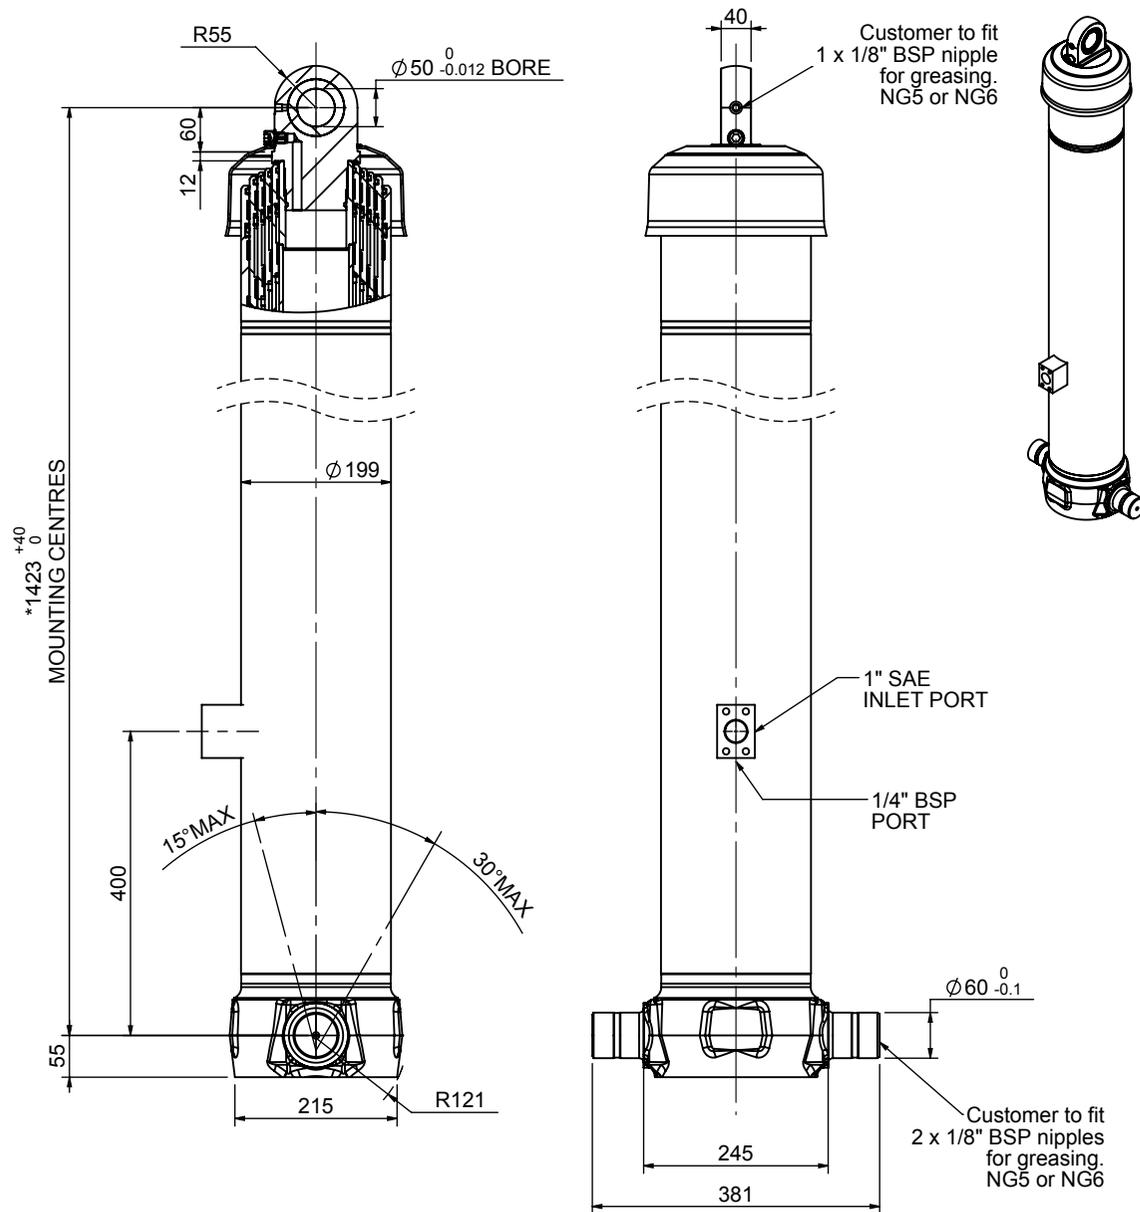


*Includes 7mm Pull Out.
All Stages Chrome Plated

CS17LS55733S40A02C-203/CAP

SPECIFICATION		TIPPING CAPACITY : 32-45 TONNES***		
Stage	Diameter	Length	Stroke	Swept Volume
-	-	-	-	-
0	199	1375	-	-
1	176	1340	1120	27
2	155	1340	1137	21
3	136	1340	1147	17
4	117	1340	1162	12
5	98	1340	1167	9
Total (+5/-10)			5733	86
Final stroke reduced by	0	Priming Volume		18
Cylinder Mass (Kg)	198	Total Volume (Litres)		104
Maximum Pressure (Bar)	190	Max. first stage thrust		200 KN

***TIPPING CAPACITY AT WORKING PRESSURE

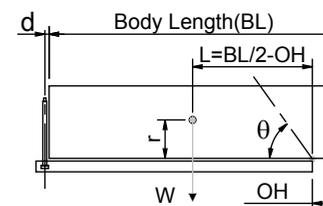

BODY LENGTH (BL)						OH
7170		7529		7887		
35	49°	33	47°	32	44°	150
39	52°	36	49°	34	46°	450
45	54°	41	51°	38	48°	750

d = 0; r = 900; Working Pressure 145 bar

For guidance only;

Higher working pressures and tipping capacities may be possible.

To check your application email - applications@edbro.co.uk

NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer black paint to RAL9005
3. Refer to www.edbro.com for:-
 - Bracket details
 - Installation instructions that must be observed
 - Correct oil selection
 - An explanation of tipping capacity



JOST UK Ltd
Edbro Hse, Nelson Street, Bolton, England, BL3 2JJ
Tel +44 (0) 1204 528888 Fax +44 (0) 1204 531957
Email: postmaster@edbro.com Web: www.edbro.com

Technical Specifications are subject to change without notice
Date Created/Updated: 13 November 2020
Refer www.edbro.com to confirm latest specification
All dimensions are in 'mm', unless otherwise stated