


Cylinder 5 stage front end with spherical eye

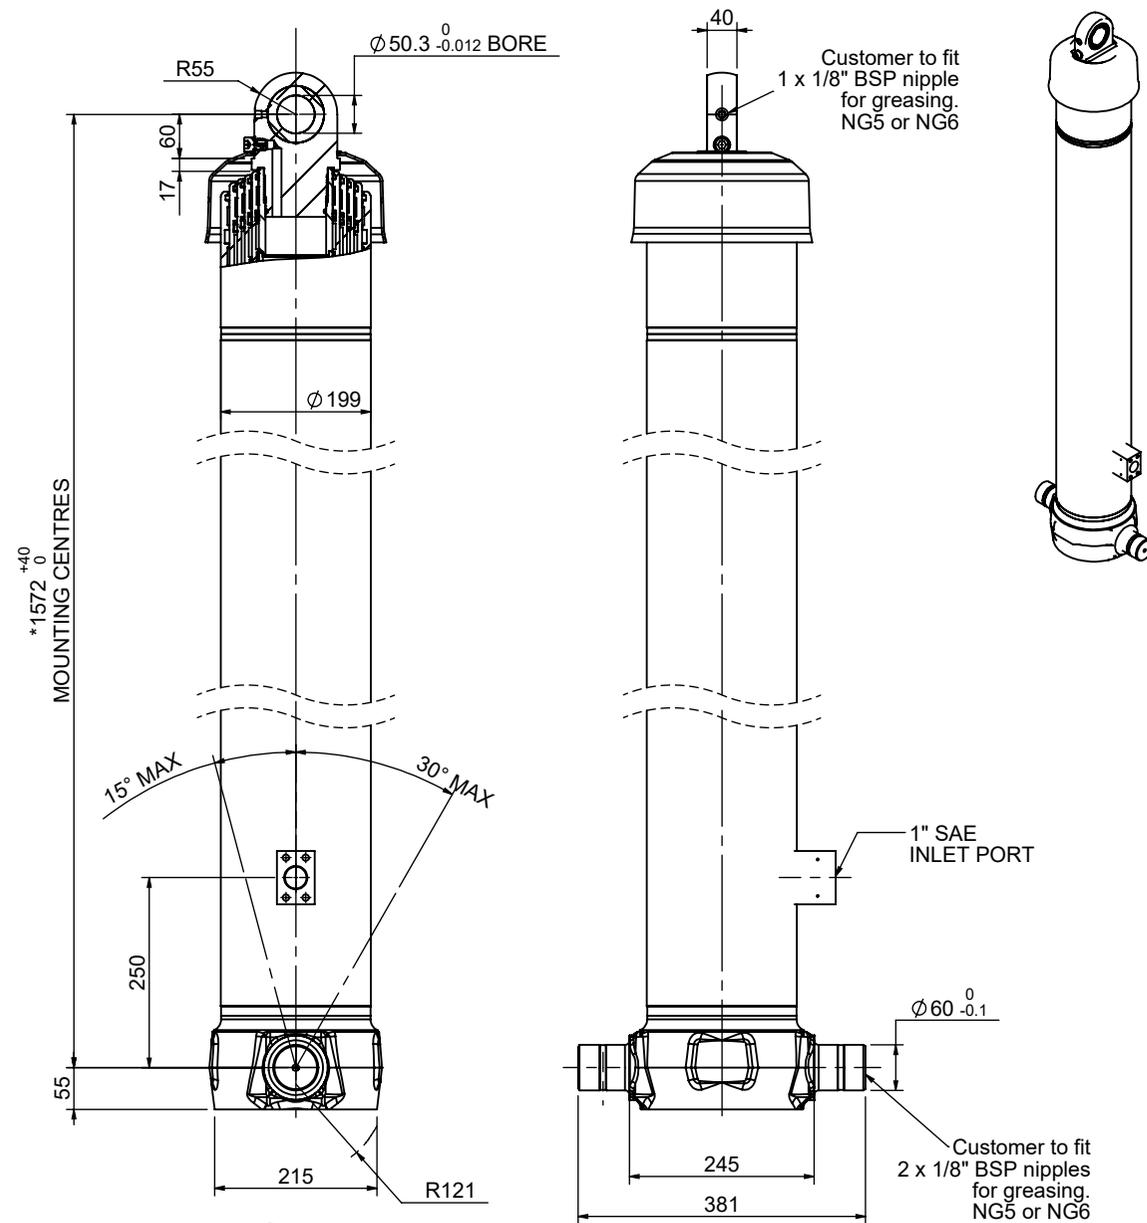


*Includes 7 mm Pull Out.
Last Stage Chrome Plated

CS17LS56483R25A02/CAP

SPECIFICATION		TIPPING CAPACITY : 26 - 36 TONNES***		
Stage	Diameter	Length	Stroke	Swept Volume
-	-	-	-	-
0	199	1525	-	-
1	176	1490	1270	31
2	155	1490	1287	24
3	136	1490	1297	19
4	117	1490	1312	14
5	98	1490	1317	10
Total (+5/-10)			6483	98
Final stroke reduced by	0	Priming Volume	20.8	
Cylinder Mass (Kg)	217	Total Volume (Litres)	118.8	
Maximum Pressure (Bar)	190	Max. first stage thrust	200 KN	

***TIPPING CAPACITY AT WORKING PRESSURE

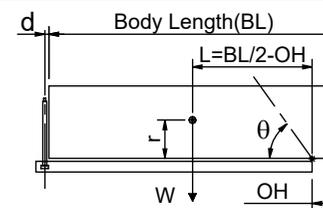

BODY LENGTH (BL)						OH
8000		8500		9000		
29	50°	27	46°	26	44°	150
32	52°	30	48°	28	45°	450
36	54°	33	50°	30	47°	750

d = 0; r = 900; Working Pressure 124 bar

For guidance only;

Higher working pressures and tipping capacities may be possible.
To check your application email - applications@edbro.co.uk

NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer paint to RAL5013
3. Refer to www.edbro.com for;-
 - Bracket details
 - Installation instructions that must be observed
 - Correct oil selection
 - An explanation of tipping capacity



EDBRO Ltd.
Edbro House, Nelson Street, Bolton, England, BL3 2JJ
Tel +44 (0) 1204 528888 Fax +44 (0) 1204 531957
Email: sales@edbro.com Web: www.edbro.com

Technical Specifications are subject to change without notice
Date Created/Updated: 06 August 2021
Refer www.edbro.com to confirm latest specification
All dimensions are in 'mm', unless otherwise stated