


Cylinder 5 stage front end with plain eye

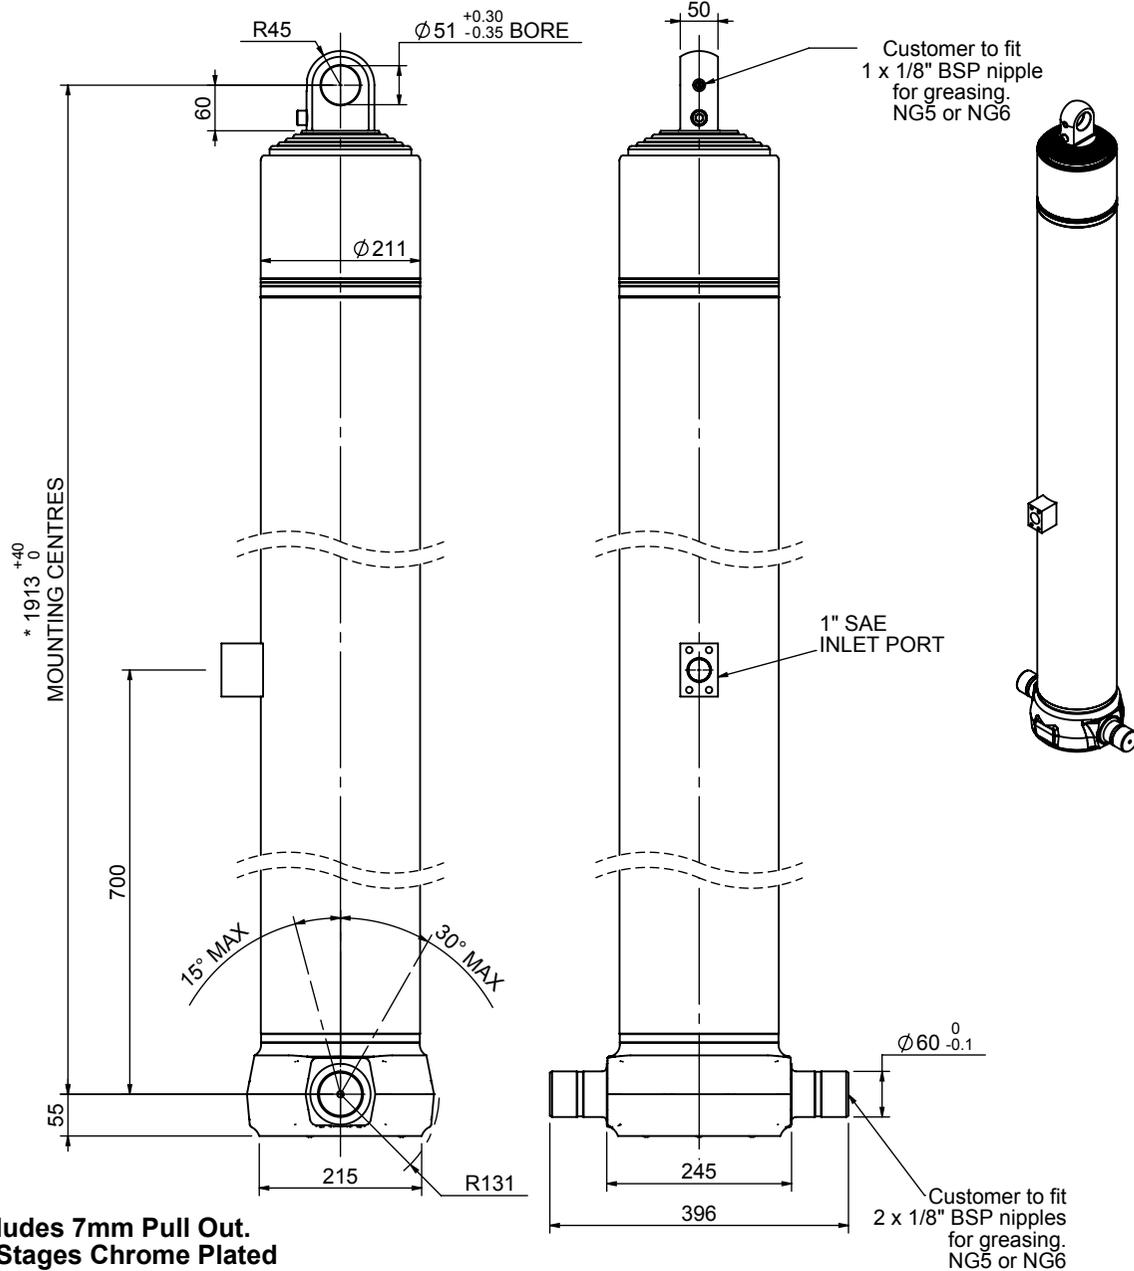


*Includes 7mm Pull Out.
All Stages Chrome Plated

CS18LE58233S70A02C

SPECIFICATION TIPPING CAPACITY : 26-33 TONNES***

Stage	Diameter	Length	Stroke	Swept Volume
-	-	-	-	-
0	211	1875	-	-
1	188	1840	1620	45
2	167	1840	1637	36
3	147	1840	1647	28
4	127	1840	1662	21
5	105	1840	1667	14
Total (+5/-10)			8233	144
Final stroke reduced by	0	Priming Volume		26.7
Cylinder Mass (Kg)	308	Total Volume (Litres)		170.7
Maximum Pressure (Bar)	190	Max. first stage thrust		200 KN

***TIPPING CAPACITY AT WORKING PRESSURE

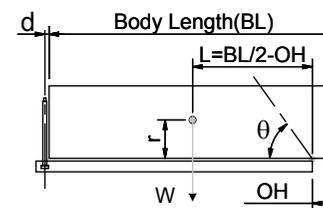

BODY LENGTH (BL)						OH
10000		10500		11000		
28	48°	27	45°	26	43°	150
30	49°	29	47°	27	44°	450
33	51°	31	48°	29	46°	750

d = 0; r = 900; Working Pressure 110 bar


Tipping angle (θ)
Body + payload mass, W (tonne)

For guidance only;

Higher working pressures and tipping capacities may be possible.
To check your application email - applications@edbro.co.uk

NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer paint to RAL5013
3. Refer to www.edbro.com for:-
 - Bracket details
 - Installation instructions that must be observed
 - Correct oil selection
 - An explanation of tipping capacity

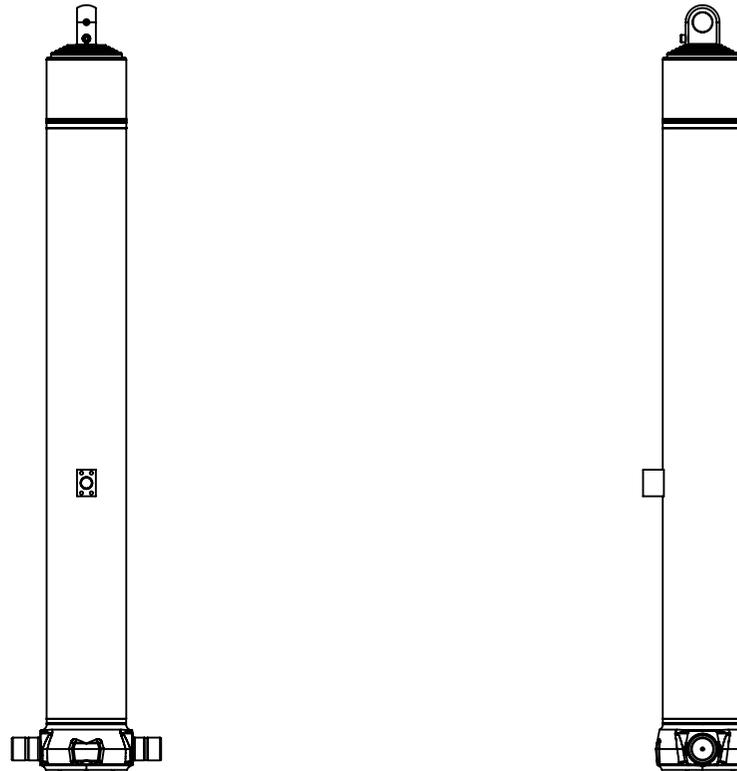

CS18LE58233S70A02C