


Cylinder 5 stage front end with spherical eye

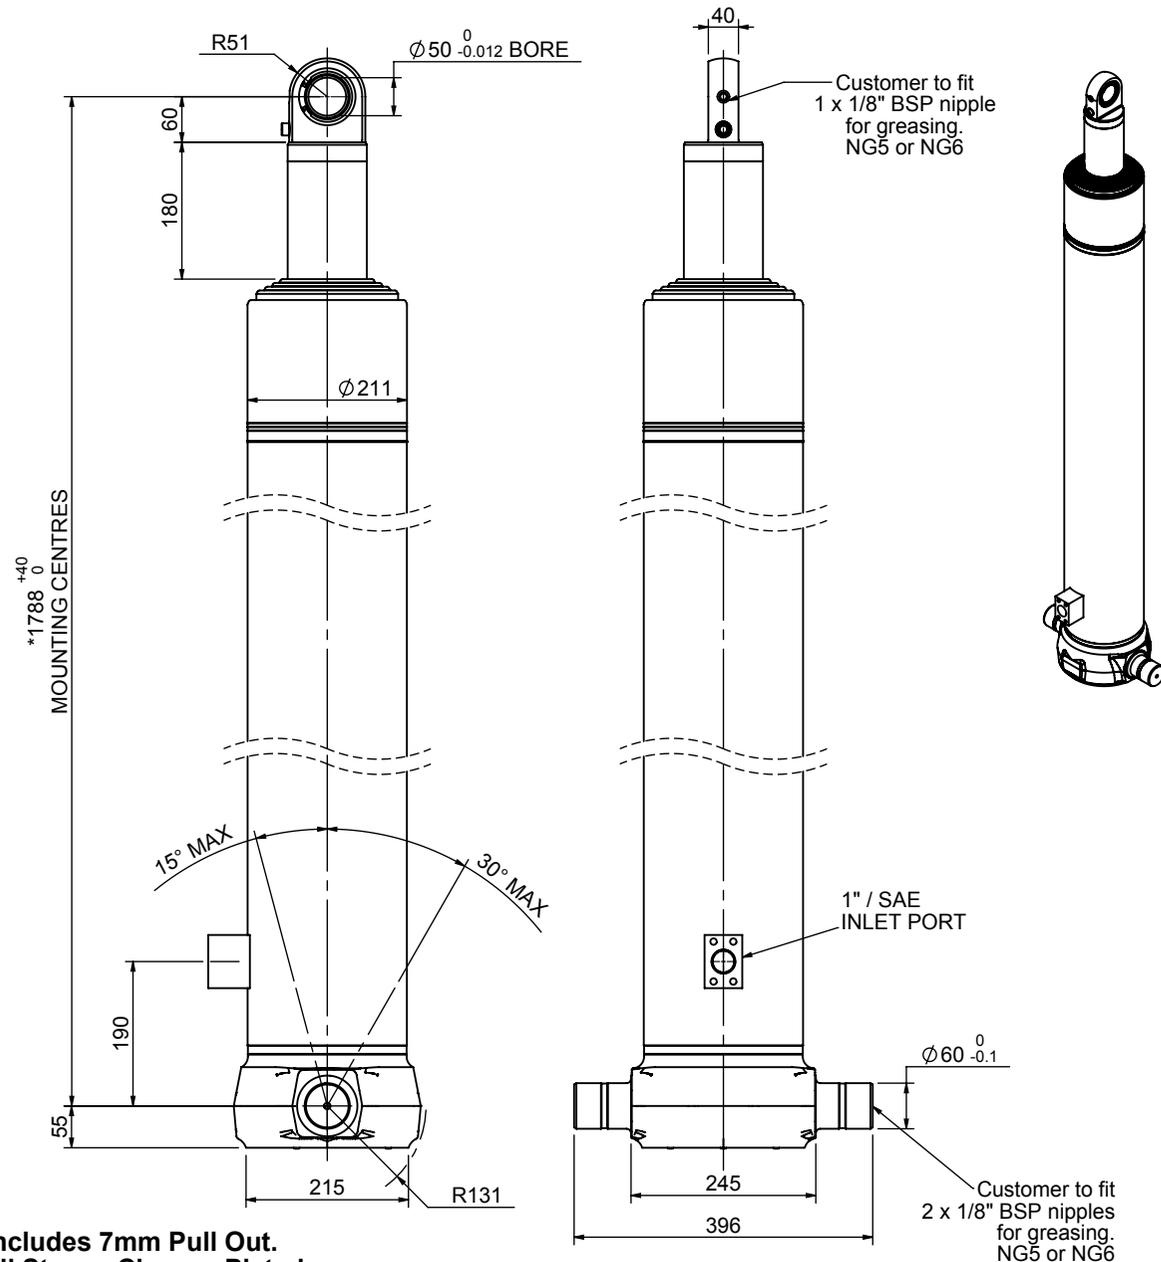

*Includes 7mm Pull Out.
All Stages Chrome Plated

CS18LS56733S19A09C

SPECIFICATION		TIPPING CAPACITY :			TONNES***
Stage	Diameter	Length	Stroke	Swept Volume	
-	-	-	-	-	
0	211	1575	-	-	
1	188	1540	1320	37	
2	167	1540	1337	29	
3	147	1540	1347	23	
4	127	1540	1362	17	
5	105	1715	1367	12	
			Total (+5/-10)	6733	118
Final stroke reduced by		0	Priming Volume		22
Cylinder Mass (Kg)		266	Total Volume (Litres)		140
Maximum Pressure (Bar)		190	Max. first stage thrust		200 KN

***TIPPING CAPACITY AT WORKING PRESSURE


REFER ENQUIRY H023-2013

For guidance only;

Higher working pressures and tipping capacities may be possible.
To check your application email - applications@edbro.co.uk

NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer paint to RAL5013
3. Refer to www.edbro.com for:-
 - Bracket details
 - Installation instructions that must be observed
 - Correct oil selection
 - An explanation of tipping capacity

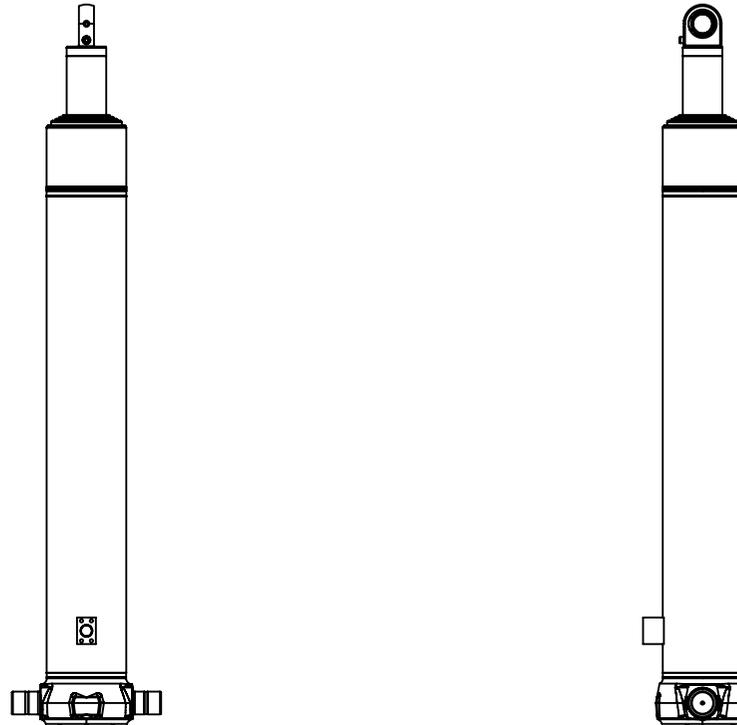

CS18LS56733S19A09C