


Cylinder 5 stage front end with spherical eye

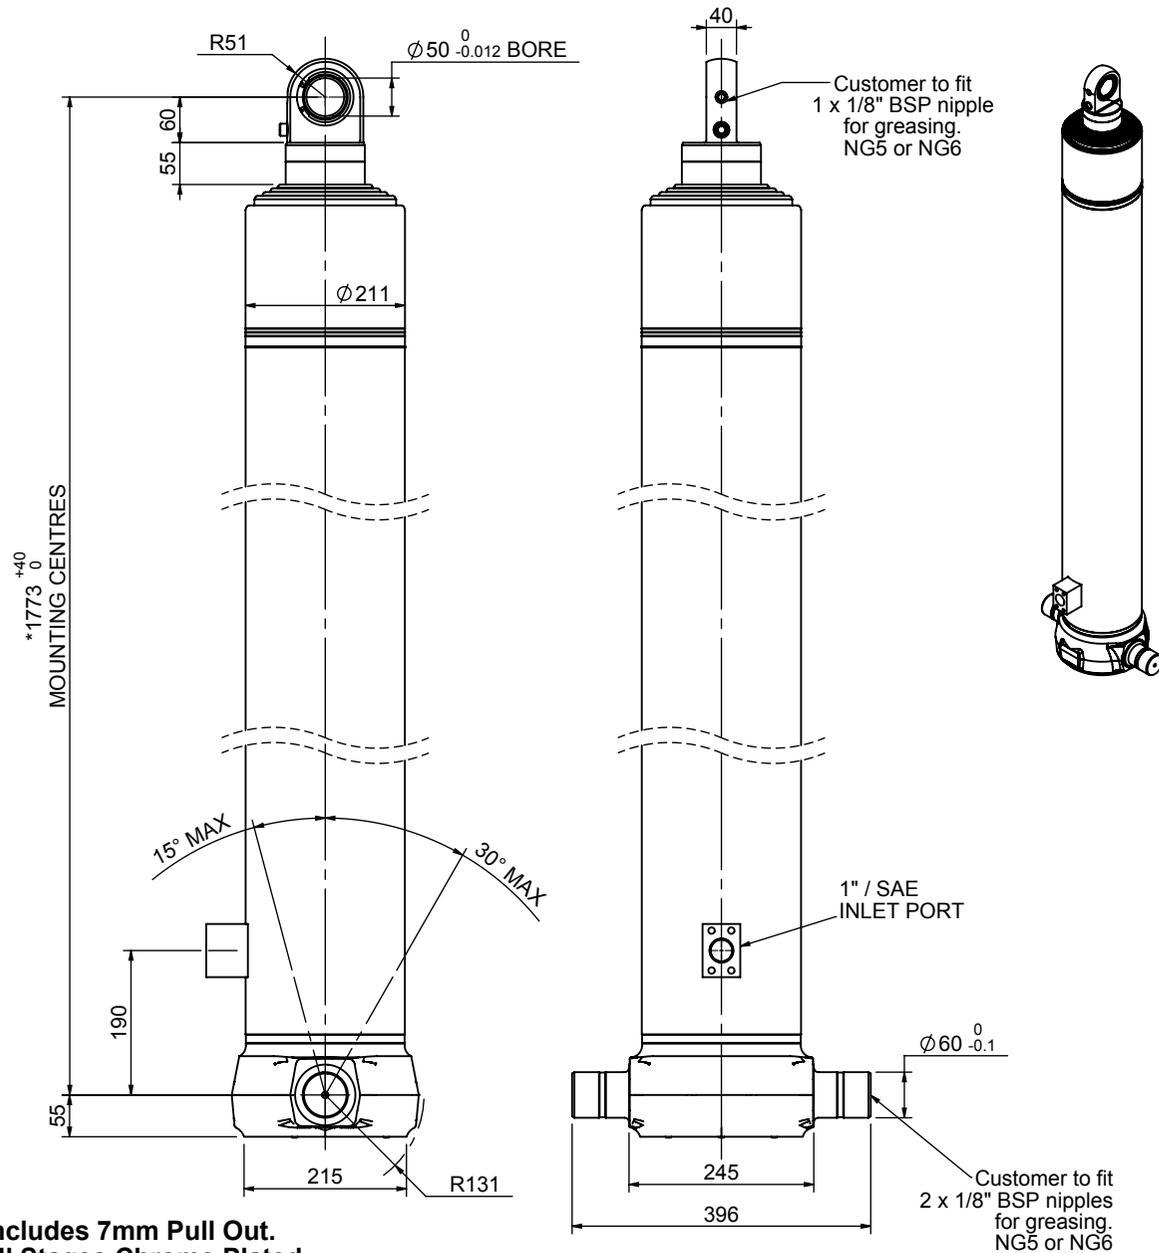

*Includes 7mm Pull Out.
All Stages Chrome Plated

CS18LS56733S19M04C

SPECIFICATION	TIPPING CAPACITY :			TONNES***	
	Stage	Diameter	Length		Stroke
-	-	-	-	-	-
0	211	1685	-	-	-
1	188	1650	1430	40	
2	167	1650	1447	32	
3	147	1650	1457	25	
4	127	1650	1472	19	
5	105	1700	927	8	
		Total (+5/-10)	6733		124
Final stroke reduced by	0	Priming Volume			24
Cylinder Mass (Kg)	280	Total Volume (Litres)			148
Maximum Pressure (Bar)	190	Max. first stage thrust			200 KN

***TIPPING CAPACITY AT WORKING PRESSURE

REFER ENQUIRY H023-2013

For guidance only;

Higher working pressures and tipping capacities may be possible.
To check your application email - applications@edbro.co.uk


NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer paint to RAL5013
3. Refer to www.edbro.com for;-
 - Bracket details
 - Installation instructions that must be observed
 - Correct oil selection
 - An explanation of tipping capacity

Edbro
SETTING THE INDUSTRY STANDARD

Edbro plc
Nelson Street, Bolton, England, BL3 2JJ
Tel +44 (0) 1204 528888 Fax +44 (0) 1204 531957
Email: postmaster@edbro.com Web: www.edbro.com

Technical Specifications are subject to change without notice
Date Created/Updated: 20 February 2015
Refer www.edbro.com to confirm latest specification
All dimensions are in 'mm', unless otherwise stated

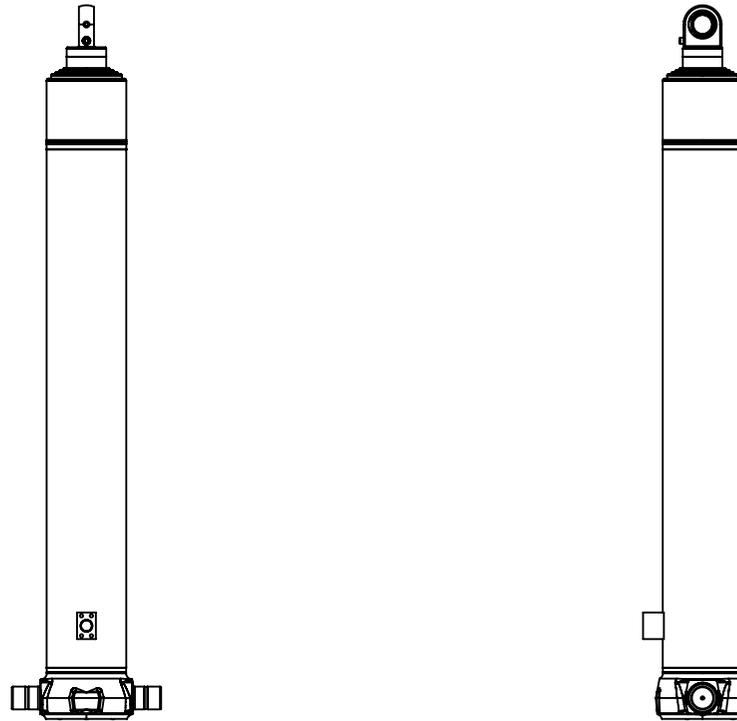

CS18LS56733S19M04C