


Cylinder 5 stage front end with outer cover

****ALLOW 50mm TO REMOVE CAP FOR SERVICING**

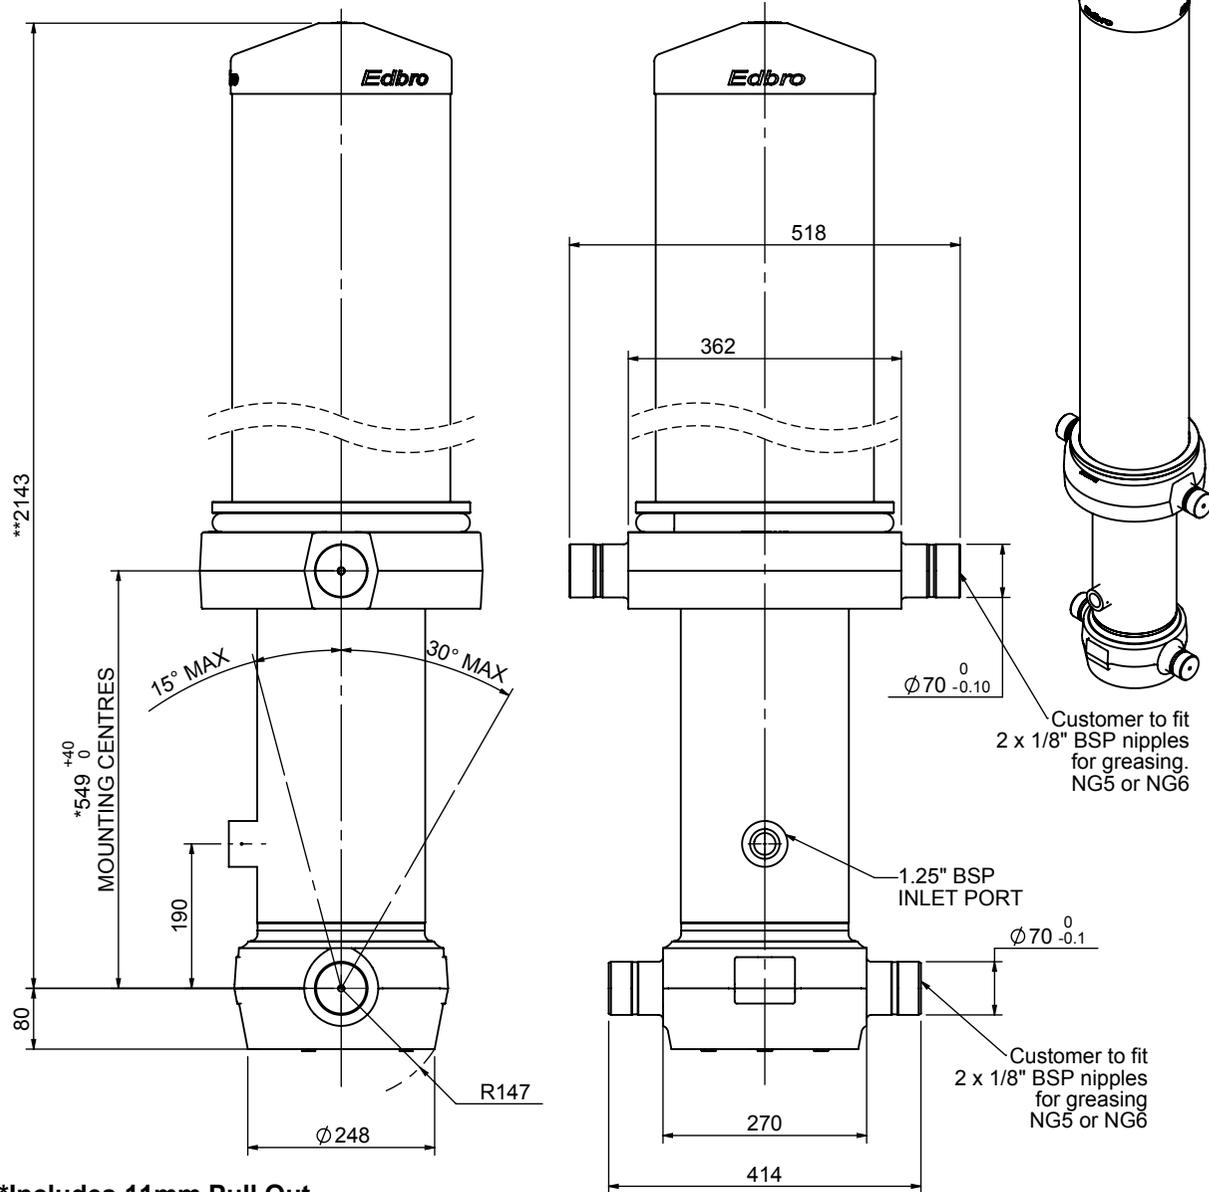

***Includes 11mm Pull Out.**


CS190059178B19A12

SPECIFICATION

TIPPING CAPACITY : 34-43 TONNES***

Stage	Diameter	Length	Stroke	Swept Volume
OUTER COVER	289	1530	-	-
0	223	2078	-	-
1	198	2040	1806	56
2	176	2040	1827	44
3	155	2040	1837	35
4	136	2040	1847	27
5	117	2040	1862	20
Total (+5/-10)			9179	182
Final stroke reduced by	0	Priming Volume		36
Cylinder Mass (Kg)	469	Total Volume (Litres)		218
Maximum Pressure (Bar)	190	Max. first stage thrust		350 KN

***TIPPING CAPACITY AT WORKING PRESSURE

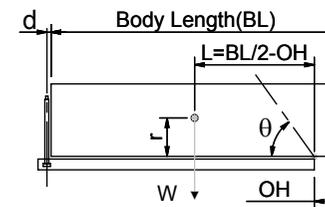

BODY LENGTH (BL)						OH
10500	11000	11500				
37	52°	35	49°	34	47°	150
39	53°	37	51°	36	48°	450
43	55°	40	52°	38	50°	750

$d = 229$; $r = 900$; Working Pressure 110 bar

Tipping angle (theta)

Body + payload mass, W (tonne)



For guidance only;

Higher working pressures and tipping capacities may be possible.

To check your application email - applications@edbro.co.uk

NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer paint to RAL5013
3. Refer to www.edbro.com for:-
 - Bracket details
 - Installation instructions that must be observed
 - Correct oil selection
 - An explanation of tipping capacity

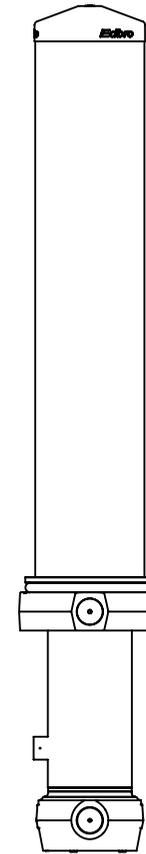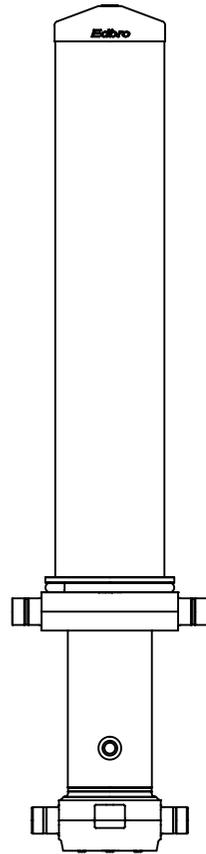

CS190059178B19A12