

Hydraulic Control Valve - Mechanically operated CT041M050P175M


Mechanically operated proportional tipping valve to suit light duty tipper trucks.
Open center hydraulic scheme according to CE standards.

- * Built-in check and adjustable relief valves
- * Mechanical Direct End-of-stroke with anti-shock spring
- * Ready for pressure signal switch mounting
- * Galvanized body and nickel spool
- * Compact size
- * Guaranteed for oil temperature range -15+110 °C, viscosity range 12-100 cSt and oil filtering 25 µm.
- * Rated return flow 45L/Min
- * Mounting kit included



SPECIFICATION

Part Number	IN	TANK	OUT
CT041M050P175M	G 1/2	G 1/2	G 1/2

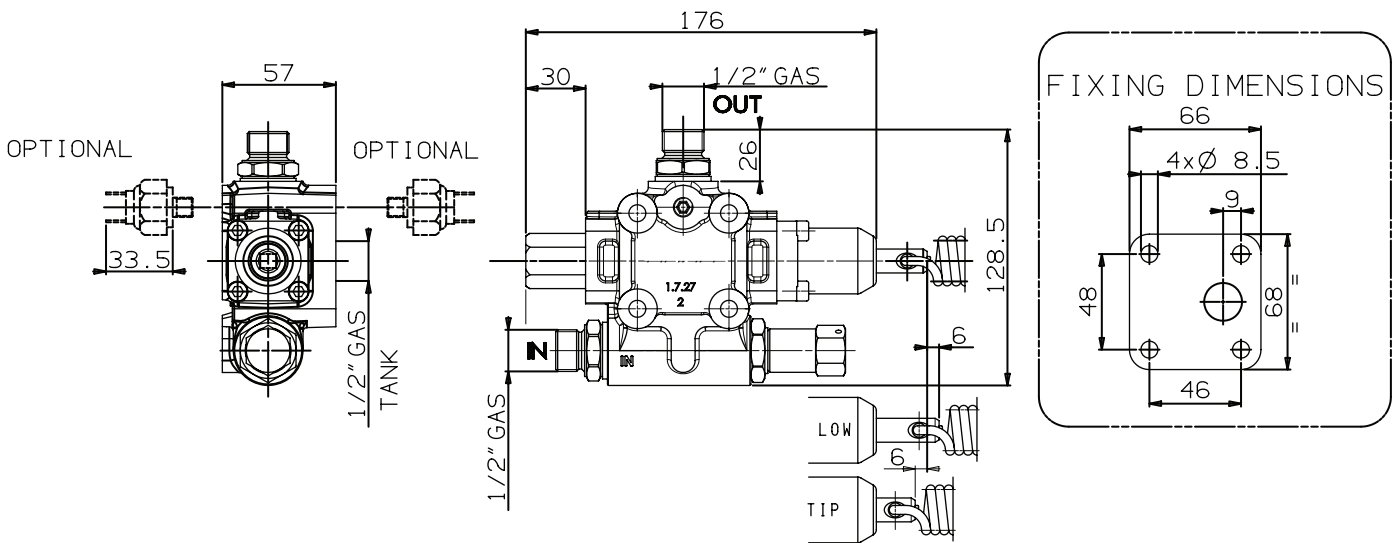

Rev1, March 2015

All dimensions are given in mm unless otherwise stated. Technical Specifications are subject to change without notice.