



Medium Duty Gear Pump: For tipper application - EGP0025170

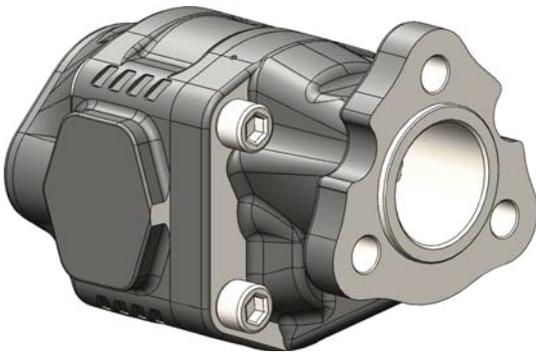

- * 3-hole gear pump for medium duty applications
- * EGP025170 - anti-clockwise (left) rotation
- * EGP025170C - clockwise (right) rotation
- * 25cm³/rev output flow
- * Medium pressure (220 bar MWP)
- * Compact size for easy installation
- * Ideal for close coupled PTO mounting
- * Bronze trust plates for maximum durability

Dim A = 162 mm
Dim B = 102mm
Weight = 6.5 kg

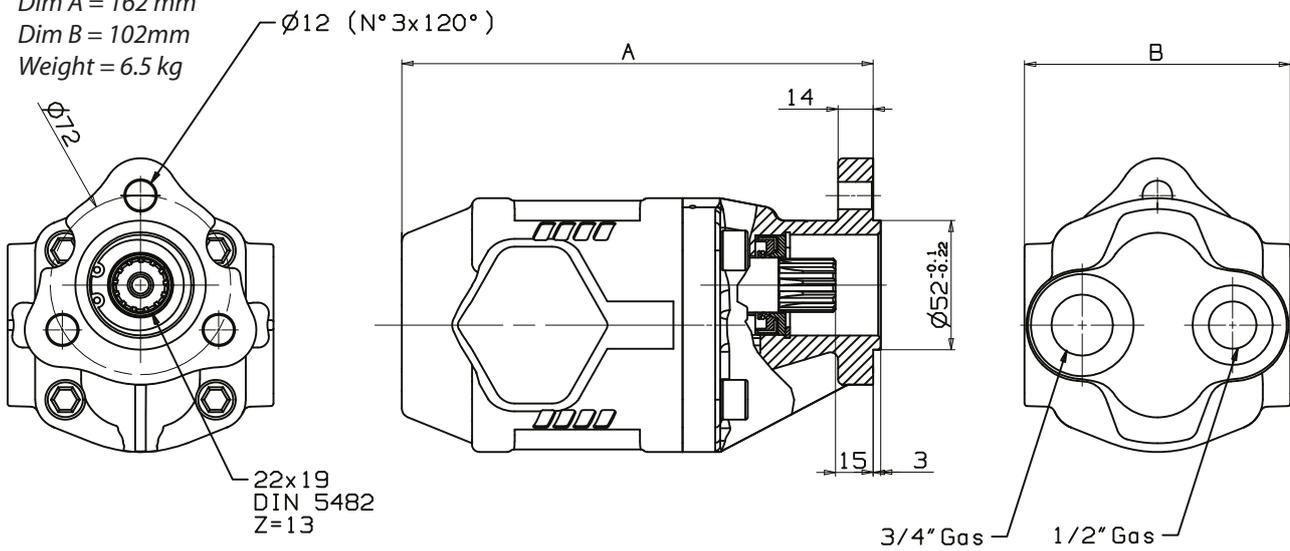

PERFORMANCE

Displacement	cm ³ /rev	25
Working pressure	bar	220
Max pressure	bar	240
Max. working speed	rpm	2200 @ 200 bar 3000 @ 220 bar 3500 @ no pressure

PIPES

Size: Suction 3/4 inch
Pressure 1/2 inch
Pipe runs should be direct and short, with no kinks.

OIL & FILTRATION

- * This pump is designed for medium pressure, intermittent use tipping systems without filtration.
- * The oil should be a good quality hydraulic oil to ISO 6743/4 HM32 for -15^o to +27^oC working temperature.
- * For extended life 25 um absolute return line filtration is recommended.
- * Oil cleanliness is maintained to ISO 4406 class 19/16.
- * Oil should be replaced annually.

All dimensions are given in mm unless otherwise stated. Technical Specifications are subject to change without notice.