

High Pressure Hoses - OP83/OP87/OP88


- Twin high tensile steel braided
- Highly flexible with compact dimensions
- Meets EN853/DIN 20022-2SN and SAE100R2AT
- All fittings to BSP standard, 60° cone, unless otherwise stated



STRAIGHT FITTINGS BOTH ENDS: OP87/*/**

/* denotes bore in 1/8", i.e. OP87/6 is 3/4" bore


/** denotes length in inches, i.e. OP87/6/84 is 84" long

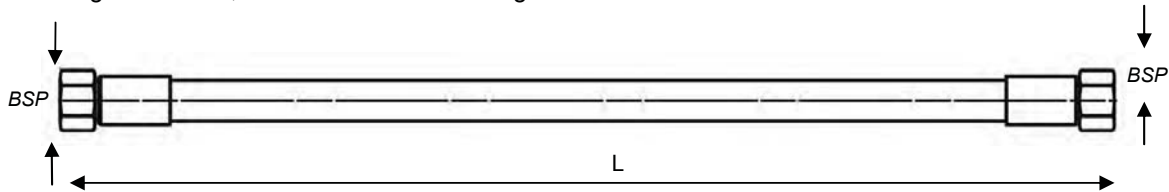

90° ELBOW ONE END: OP88/*/**

/* denotes bore in 1/8", i.e. OP88/8 is 1" bore

/** denotes length in inches, i.e. OP88/8/84 is 84" long

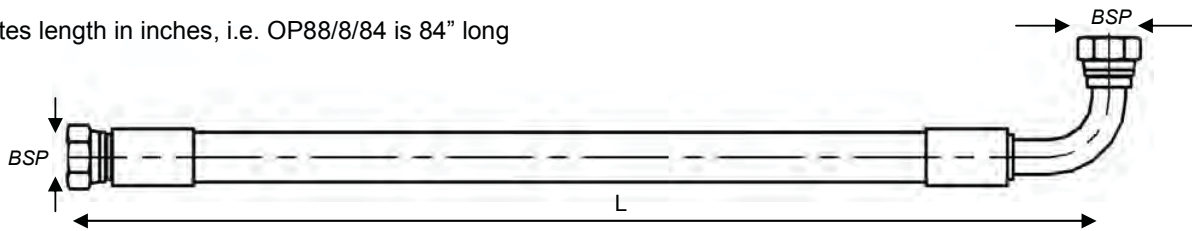

NOM SIZE		TYPE	PART NO.	L LENGTH OPTION (inches)							
BSP	MWP			39	48	54	60	66	72	84	
1/2"	275	STRAIGHT	OP83/	39	48	54	60	66	72	84	
		ELBOW	OP88/4	42	48						
3/4"	215	STRAIGHT	OP87/6	36	48	60	72	84	96	120	156
		ELBOW	OP88/6	30	48	60	72	84			
1"	165	STRAIGHT	OP87/8	36	48	60	84	96	108	120	
		ELBOW	OP88/8	54	84						

Other sizes and specifications are available, please enquire further if necessary.

All dimensions are given in mm unless otherwise stated. Technical Specifications are subject to change without notice.