


Cylinder 4 stage front end with outer cover

****ALLOW 50mm TO REMOVE CAP FOR SERVICING**

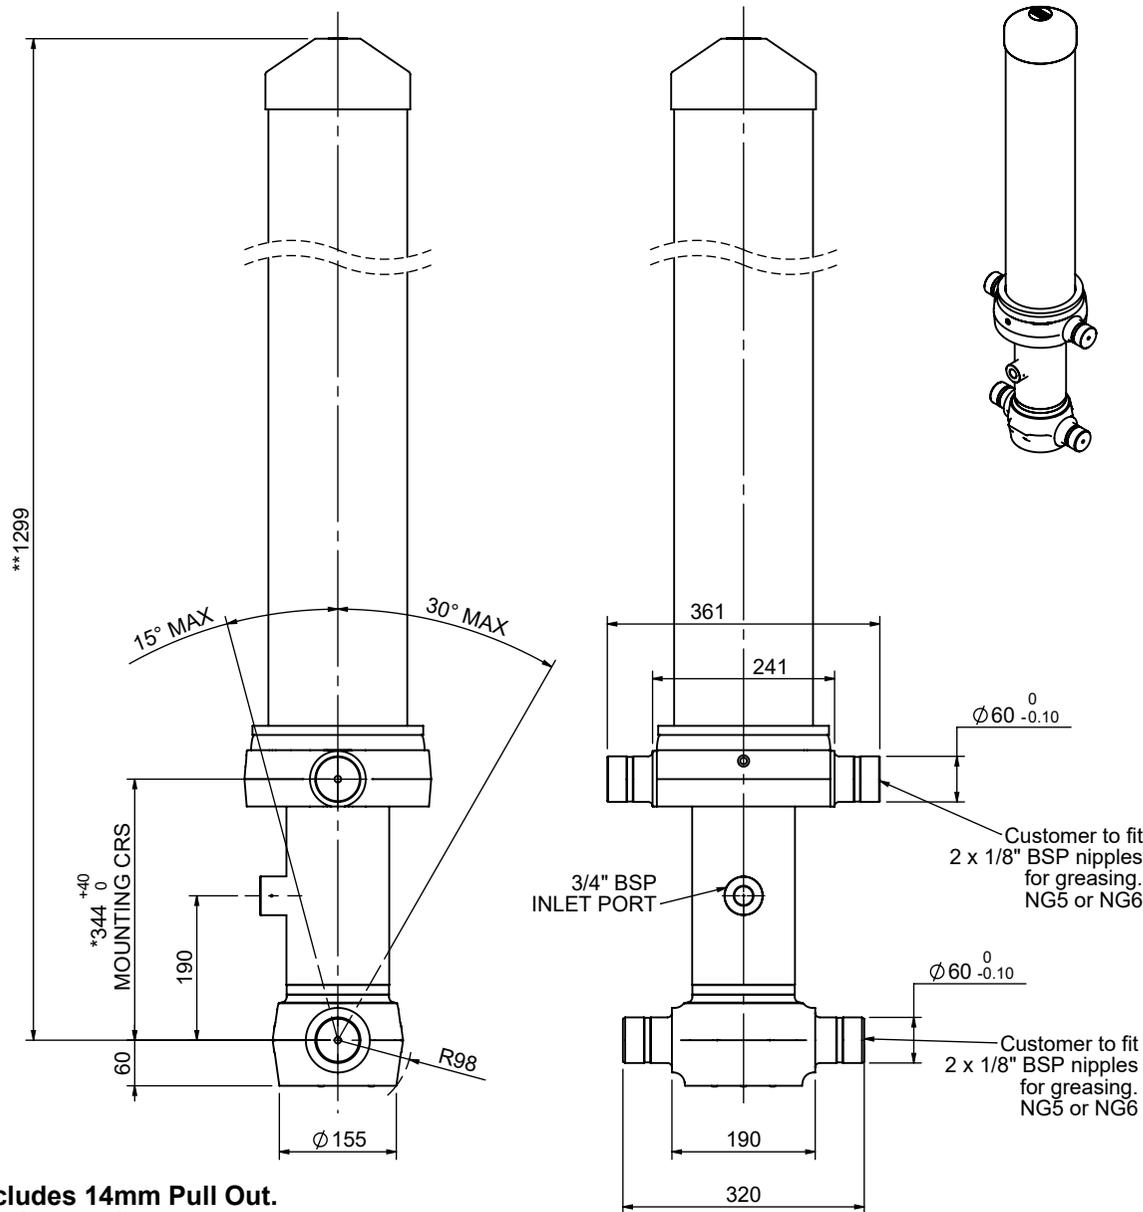


***Includes 14mm Pull Out.
All Stages Chrome Plated**

CS110044071B19A31C

SPECIFICATION		TIPPING CAPACITY : 17-29 TONNES***		
Stage	Diameter	Length	Stroke	Swept Volume
-	-	-	-	-
OUTER COVER	184	900	-	-
0	136	1225	-	-
1	117	1190	998	11
2	98	1190	1017	8
3	79	1190	1022	5
4	63	1190	1027	3
Total (+5/-10)			4064	27
Final stroke reduced by	0	Priming Volume		8
Cylinder Mass (Kg)	123	Total Volume (Litres)		35
Maximum Pressure (Bar)	190	Max. first stage thrust		130 KN

***TIPPING CAPACITY AT WORKING PRESSURE

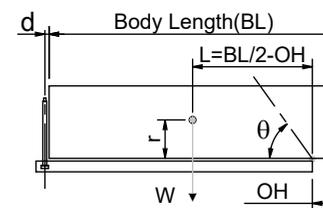

BODY LENGTH (BL)						OH
5000	5250	5500	5750	6000	6250	
19	48°	18	45°	17	43°	150
22	51°	21	48°	19	46°	450
29	55°	26	51°	23	49°	750


d = 178; r = 750; Working Pressure 175 bar

For guidance only;

Higher working pressures and tipping capacities may be possible.
To check your application email - applications@edbro.co.uk

NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer paint to RAL5013
3. Refer to www.edbro.com for:-
 - Bracket details
 - Installation instructions that must be observed
 - Correct oil selection
 - An explanation of tipping capacity

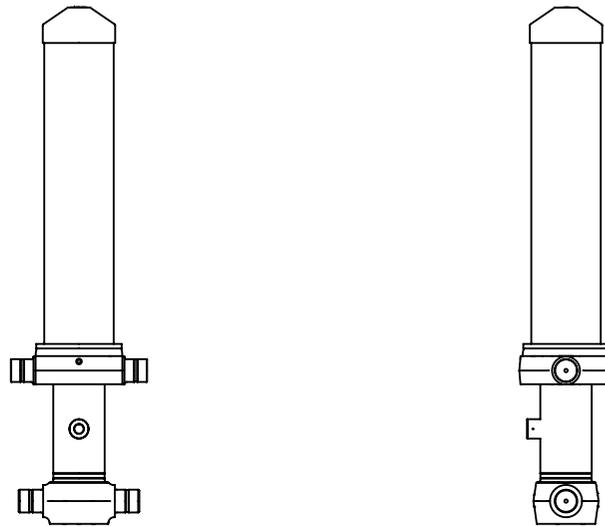

CS110044071B19A31C